
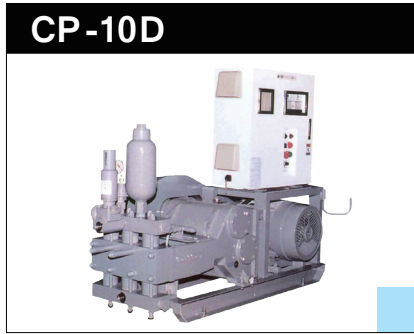


# Plunger Type: CPW/CP SERIES

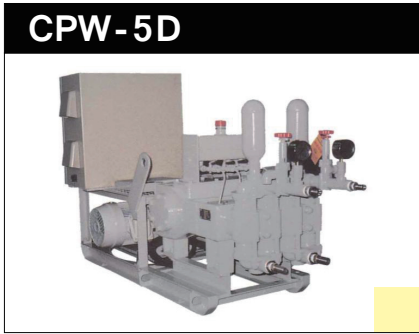

MODEL	CPW-5D	CP-10D	CP-20
Type	Two separately port, Two-cylinders, Double acting, Plunger type	Double acting, Plunger type	
No. of plunger	4	3	
Discharge volume (L/min)	Belt: 3.6~14.4 x 2 Inv: 2~20 x 2	120	211
Discharge pressure (MPa)	3.4 {35}	8 {80}	3.8 {39}
Plunger diameter (mm)	40	60	75
Plunger stroke (mm)	45	60	60
Power	3.7kW/6P	11kW/4P	15kW/4P
Dimensions (L x W x H) (mm)	Belt: 1420 x 545 x 755 Inv: 1225 x 575 x 800	1545 x 625 x 1175	1580 x 660 x 1290
Mass (kg)	Belt: 380 Inv: 300	320	680 (Setting with electric motor)

Mass: Setting with electric motor and control box

## CPW-5D

■ Pump for chemical grouting

## CP-10D / CP-20

■ Pump for drilling and grouting